

XCAL-Pu9

Benchmarking (Chipset, Mobile, System, Operators...)

Versatile 3-in-1 Benchmarking Platform up to 9UEs

XCAL-Pu9 packages drive test, unattended benchmarking and an in-building test solution into a compact, lightweight and powerful tool.

The Pu9 can support up to nine mobile phones that can be provisioned to benchmark a range of competitors over all Key mobile access technologies like 2G, 3G, LTE, LTE-A(CA ~ 6CA), PS-LTE(MCPTT), eMTC(Cat.M1) and NB-IoT.

Thanks to its light weight chassis, it is suitable for walk test.

Use XCAL-Pu9 to

- Perform both manual and autonomous competitive network benchmarking and troubleshooting
- Conduct a wide range of application testing and application performance analysis
- Monitor and improve
 - : Web browsing – HTML
 - : Mobile Messaging – SMS
 - : Downloads and Uploads – FTP/iPerf
 - : Streaming Video and audio – YouTube
 - : mVoIP and VoLTE


Benefits

- The Pu9 guarantees the best possible mobile experience on the network to ensure customer satisfaction.
- Coupled with XCAP-Vuze, AEGIS, the Pu9 can also be used in end to end network performance assessment and network auditing
 - : Streamlined network application testing
 - : Reduced costs – ‘all in one’ platform means that the Pu9 can be used to perform a variety of tests on one scalable platform
 - : Increase test accuracy and detail
 - : Monitoring the most important live services
 - : Improved time to market for new services
- Perform standard-based Voice MOS Tests

XCAL-Smart applicable

- App execution and result reporting by device.
- Auto control of Voice/Data Call
- Automation of app execution and operating test APP.
- Collecting RF information through API
- Real-time communication with DM through ADB connection

XCAL-Pu9 System Configuration

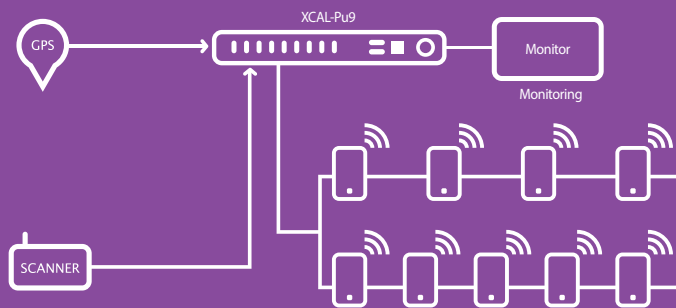

Features


- Interfacing with various devices
 - : Mobile Phone, USB Modem (Smart phone : up to 9 / USB modem : 1)
 - : GPS (1 unit)
 - : Scanner (2unit)
- Backpack carryable, High mobility for walking test
- External Battery pack applicable
- Support standard based MOS test
- Support various QoS algorithm
 - : PESQ : P862, P862-1, P862-2
 - : POLQA : P863 Narrow Band & Wide Band

* XCAL-Smart function supportable (recommended)

Title	Spec	Note
Power Input	DC 24V	
Power Consumption	Stand-by < 10W (MCU Stand-by) Stand-by < 60W (CPU Stand-by) Maximum < 240W	
CPU	Intel Core i7-4700E 2.4GHz (Haswell)	
SSD/Memory	256GByte / 16GByte	
External Interface	USB3.0 x 4 ports 1Gbps LAN x 2 ports Master Phone Interface x 9	
Phone Interface	Connector : USB 3.0	Maximum : 9 ports
Size	228 x 46.5 x 160 (mm, W x H x D)	
Weight	1.56kg	
Bag (Total Weight)	15.65kg(Bag+9Mobiles+1Battery+etc) 18.35kg(Bag+9Mobiles+2Batteries+etc)	Running Time(Battery) : 4H ~ 5H Running Time(2Batteries) : 8H~10H

XCAL-Pu9

Benchmarking (Chipset, Mobile, System, Operators...)

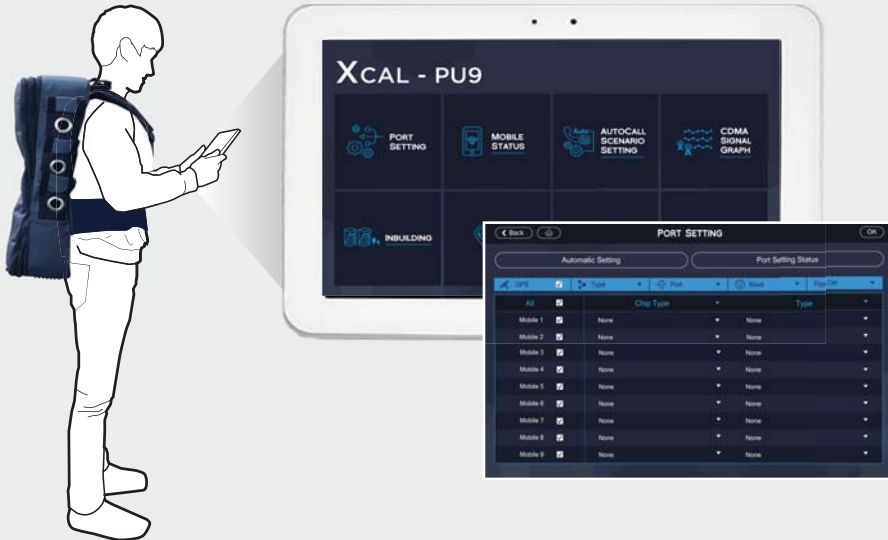

Regional offices

South Korea (HQ)
Innowireless Co., Ltd.

Sales:
salesteam@innowireless.co.kr
Tel : +82-31-788-1700

USA
Accuver Americas, Inc.

Sales:
sales.usa@accuver.com
Tech Support:
support.usa@accuver.com
Tel : +1-469-241-6100
Fax : +1-469-241-6199

UK
Accuver EMEA Ltd.

Sales:
sales.emea@accuver.com
Tech Support:
support.emea@accuver.com
Tel : +44-203-457-4486

Poland
Accuver EMEA Sp.

Sales:
sales.emea@accuver.com
Tech Support:
support.emea@accuver.com
Tel : +44-203-457-4486

Japan
Accuver Co., Ltd.

Sales:
sales@accuver.jp
Tech Support:
inquiry_aj@accuver.jp
Tel : +81-3-6430-2581
Fax : +81-3-6430-2589
Website : www.accuver.jp

Hong Kong
Accuver APAC Ltd.

Sales:
sales.apac@accuver.com
Tech Support:
support.apac@accuver.com
Tel : +852-2210-7004
Fax : +852-2210-7017